

# HOOK EVO 2.0

## ANCHOR POINT



### UNOBTRUSIVE

Under-tile fastening ensures a low visual impact in the roofing, for an aesthetically satisfactory result.

### PRACTICAL


Fast, simple installation. The bottom plate allows the anchor to be assembled in different positions on both timber and concrete, depending on the height of the battens and the type of tiles.



LOAD DIRECTION



TYPES OF APPLICATION

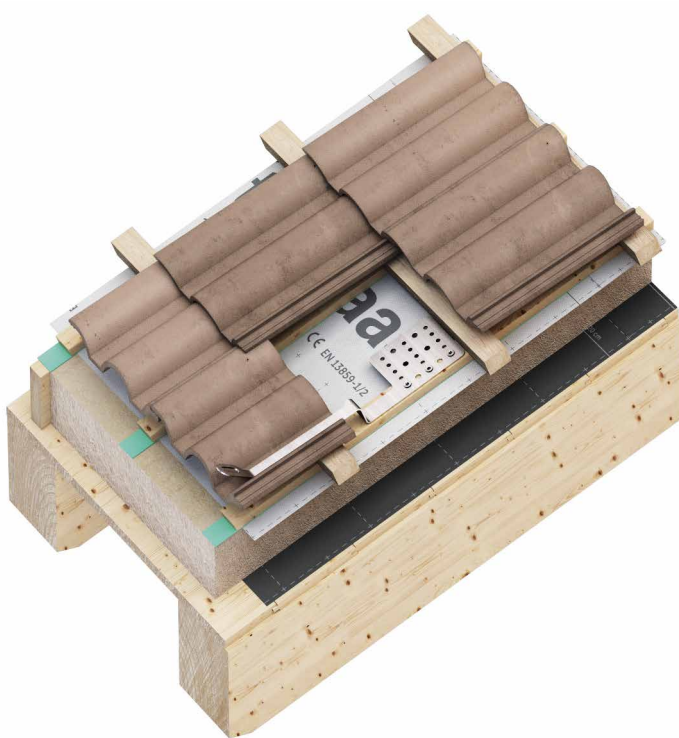

## TECHNICAL DATA\*

substructure	minimum thickness	fasteners	substructure	minimum thickness	fasteners
GL24h	80 X 100 mm + 18 mm of wooden plank	HBS Ø8	C20/25	100 mm	AB1 Ø10 M10 rod + ULS + MUT VIN-FIX/HYB-FIX

\* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

## CODES AND DIMENSIONS

CODE	material	B [mm]	H [mm]	H <sub>1</sub> [mm]	L [mm]	pcs
HOOKEVO20	AISI 304 stainless steel grade 1.4301	132	20	92	520	5
HOOKEVO50	AISI 304 stainless steel grade 1.4301	132	50	122	520	5
HOOKEVO100	AISI 304 stainless steel grade 1.4301	132	100	172	520	5

